

# Profile Pack Release Note

**File Name:** ProfilePack\_V1.05.01.bin

**Date:** 11<sup>th</sup> Oct, 2010

## Upgrade Notice

ACM camera		Upgrade Profile Pack Method	
		Web Configurator	IP Utility v3.5.23 above
<b>Firmware Version</b>	v3.09.14	N/A	Support
	v3.10.22	N/A	Support
	v3.11.13	Support	Support

ACD video server		Upgrade Profile Pack Method	
		Web Configurator	IP Utility v3.5.23 above
<b>Firmware Version</b>	v3.09.14	N/A	N/A
	v3.10.22	N/A	N/A
	v3.11.13	Support	Support

TCM and TCD products		Upgrade Profile Pack Method	
		Web Configurator	IP Utility v3.5.23 above
<b>Firmware Version</b>	V4.06.09	Support	Support


To have good video quality in night mode for TCM-5311/5312 camera, the camera profile has to be upgraded. However, the new TCM-5311/5312 camera profile could not work with old PlatformT firmware, 4.06.09 or before. It causes the firmware fails in bringing.

Please upgrade the firmware to v4.07.15 or above version first, and then update the ProfilePack\_V1.04.02 or latest Profile Pack.

The platformT firmware 4.07.15 was released formally. Most of users will use IP Utility to upgrade the new firmware and camera profile in TCM-5311/5312 camera. This IP Utility v3.5.27 will block TCM-5311/5312 camera upgrade when the firmware in the camera is

4.06 or before.

The following error message will be shown if user tried to upgrade the TCM-5311/5312 camera profile to the camera which its firmware is 4.06 or before.

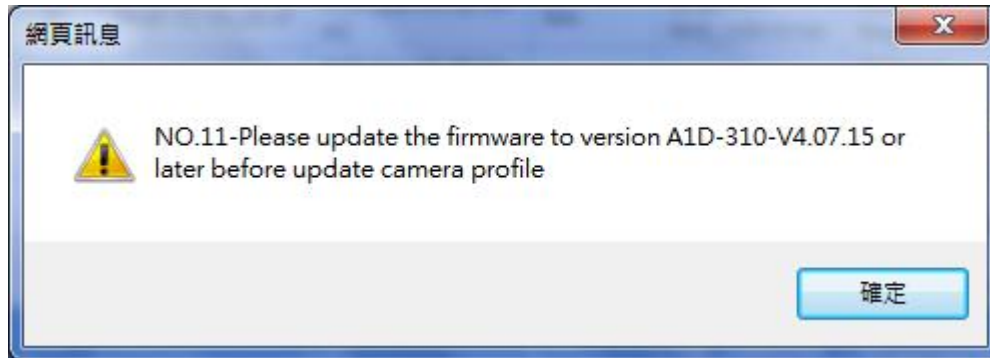

### **Model v.s. Profile Name mapping table**

After You've successfully uploaded the profile pack, you will see the following Profile Name in the System Info page.

<b>Profile Name in New Pack</b>	<b>Product</b>
ADV7180-RXX_V071030A	ACD-2100, ACD-2200, ACD-2300, ACD-2400, ACM-1311, ACM-1430, ACM-1431, ACM-1432, ACM-3210, ACM-3211, ACM-3300, ACM-3301, ACM-3310, ACM-3311, AEK-1000, AMU-8100, AMU-9110, AMU-9111
MT9M131-LB1_V091012A	ACM-1011 (LENS:f3.3 ~ 12 mm / F1.4 / 1/3" board Mount)
MT9M131-LB2_V091008A	ACM-1011 (LENS:f3.3 ~ 12 mm / F1.6 / 1/3" board Mount)
MT9V135-RA2_V071219A	ACM-1100
MT9V135-RA2_V071219A	ACM-1101
MT9V135-RB2_V071219A	ACM-1110
MT9V135-RB2_V071219A	ACM-1111
MT9M131-RB1_V090930A	ACM-1231 (LENS:f3.3 ~ 12 mm / F1.4 / 1/3" board Mount) (shipment before July 2008)

MT9M131-RB2_V090923A	ACM-1231 (LENS:f3.3 ~ 12 mm / F1.6 / 1/3" board Mount)
MT9M131-RB1_V090930A	ACM-1232 (LENS:f3.3 ~ 12 mm / F1.4 / 1/3" board Mount) (shipment before July 2008)
MT9M131-RB2_V090923A	ACM-1232 (LENS:f3.3 ~ 12 mm / F1.6 / 1/3" board Mount)
MT9M131-RB1_V090930A	ACM-1511 (LENS:f3.3 ~ 12 mm / F1.4 / 1/3" board Mount) (shipment before July 2008)
MT9M131-RB2_V090923A	ACM-1511 (LENS:f3.3 ~ 12 mm / F1.6 / 1/3" board Mount)
MT9M131-LA5_V090924A	ACM-3001
MT9M131-LB1_V091012A	ACM-3011 (LENS:f3.3 ~ 12 mm / F1.4 / 1/3" board Mount) (shipment before July 2008)
MT9M131-LB2_V091008A	ACM-3011 (LENS:f3.3 ~ 12 mm / F1.6 / 1/3" board Mount)
MT9V135-RA2_V071219A	ACM-3100
MT9V135-RA2_V071219A	ACM-3101
MT9V135-RB2_V071219A	ACM-3110
MT9V135-RB2_V071219A	ACM-3111
MT9M131-RA5_V090923A	ACM-3401
MT9M131-RB5_V090904A	ACM-3411
MT9M131-RB1_V090930A	ACM-3511 (LENS:f3.3 ~ 12 mm / F1.4 / 1/3" board Mount) (shipment before July 2008)
MT9M131-RB2_V090923A	ACM-3511 (LENS:f3.3 ~ 12 mm / F1.6 / 1/3" board Mount)
MT9M131-LA6_V091006A	ACM-3601
MT9M131-LA6_V091006A	ACM-3603
MT9M131-RA9_V090904A	ACM-3701
MT9M131-RA9_V090904A	ACM-3703
MT9M131-LA0_V091014A	ACM-4000 (Production ID : ACM4000-??? - <b>X</b> -?????)
MT9M131-LA7_V091211A	ACM-4000 (Production ID : ACM4000-??? - <b>E</b> -?????)
MT9M131-LA0_V091014A	ACM-4001

	(Production ID : ACM4001-??? - <b>X</b> -?????)
MT9M131-LA7_V091211A	ACM-4001 (Production ID : ACM4001-??? - <b>E</b> -?????)
MT9V135-RC2_V071108A	ACM-4100
MT9M131-RA0_V091014A	ACM-4200
MT9M131-RA0_V091014A	ACM-4201 (Production ID: ACM4201-??? - <b>X</b> -?????)
MT9M131-RA7_V091211A	ACM-4201 (Production ID: ACM4201-??? - <b>E</b> -?????)
MT9M131-LA0_V091014A	ACM-5001
MT9M131-RA0_V091014A	ACM-5601
MT9M131-RB0_V091013A	ACM-5611
MT53S88-RXX_V080415A	ACM-5711 (shipment before April 2008)
AD53S88-RXX_V080417A	ACM-5711
HQ1-YCX-RB0_V100416A	ACM-5811N
HQ1-YCX-RB1_V100416A	ACM-5811P
MT9M131-RB1_V090930A	ACM-7411 (LENS:f3.3 ~ 12 mm / F1.4) (shipment before July 2008)
MT9M131-RB2_V090923A	ACM-7411 (LENS:f3.3 ~ 12 mm / F1.6)
HQ1-YCX-RB2_V100416A	ACM-7511N
HQ1-YCX-RB3_V100416A	ACM-7511P
MT9M131-RA8_V091012A	ACM-8201
MT9M131-RB8_V090904A	ACM-8211
MT54G15-RXX_V080609A	ACM-8511
HQ1-656-RXX_V080219A	AMU-9100, AMU-9101
MT9M131-RB0_V091013A	AMU-9411
MT9M131-RB2_V090923A	AMU-9711
ADV7180-TAX_V091207A	TCD-2100
VX1CVBS-TXX_V100406A.	TCD-2500
MT9M131-TB4_V100406A	TCM-1231
HQ1-YCX-TB2_V100624A	TCM-1431N
HQ1-YCX-TB3_V100624A	TCM-1431P
MT9M131-TB4_V100406A	TCM-1511
MT9M131-SA2_V100406A	TCM-3001

MT9M131-SB0_V100406A	TCM-3011
MT9M131-TA3_V100406A	TCM-3401
MT9M131-TB5_V100406A	TCM-3411
MT9M131-TB4_V100406A	TCM-3511
MT9M131-SA3_V100830A	TCM-3601
MT9M131-TA4_V100924A	TCM-3701
MT9M131-TB3_V100623A	TCM-3911
MT9M131-SA1_V100406A	TCM-4000
MT9M131-SA1_V100406A	TCM-4001
MT9M131-SA0_V100406A	TCM-4101
MT9M131-TA2_V100623A	TCM-4201
MT9M131-TA0_V100406A	TCM-4301
MT9M131-SA1_V100406A	TCM-5001
MT9M131-TB1_V100406A	TCM-5211
SonyIT1-TB0_V100407A	TCM-5311
MT9M131-TA2_V100623A	TCM-5601
MT9M131-TB6_V100406A	TCM-5611
HQ1-YCX-TB0_V100624A	TCM-5811N
HQ1-YCX-TB1_V100624A	TCM-5811P
MT9M131-SB0_V100406A	TCM-7011
MT9M131-TB4_V100406A	TCM-7411
HQ1-YCX-TB2_V100624A	TCM-7511N
HQ1-YCX-TB3_V100624A	TCM-7511P
MT9M131-TB3_V100623A	TCM-7711
SonyIT1-TB1_V100407A	TCM-7811
ADV7180-TAX_V091207A	TMU-9501
MT9M131-TB5_V100406A	TMU-9611
MT9M131-TB5_V100406A	TMU-9811
MT9M131-TB4_V100406A	TMU-9911

New product profile
Update product Profile

**Modified**

1. (v1.05.01)Support new product: TCM-1431, TCM-3601, TCM-3701, TCM-5811, TCM-7511.

Click [HERE](#) to download the latest Profile Pack directly.

Click [HERE](#) to download latest IP utility