




MPEG-4 Real-time Network Streaming Indoor IP Dome

# CAM-7200 Series




- 1/3" SONY SuperHAD / EXviewHAD CCD
- Min. 0.05 Lux at F=1.2 (30 IRE, SAGC ON)
- Backlight Compensation, Auto Iris Control, Auto White Balance supported
- Surface, Flush and Wall mount supported
- MPEG-4 ASP compliant compression
- CIF up to Full D1 resolution at 30/25 FPS
- Dual MPEG-4 video stream output via LAN and WAN (PPPoE supported) ports at the same time
- QoS enabled (L3) video streaming
- One-way audio supported
- Power Over Ethernet (IEEE 802.3af) supported (CAM-7201/CAM-7221)

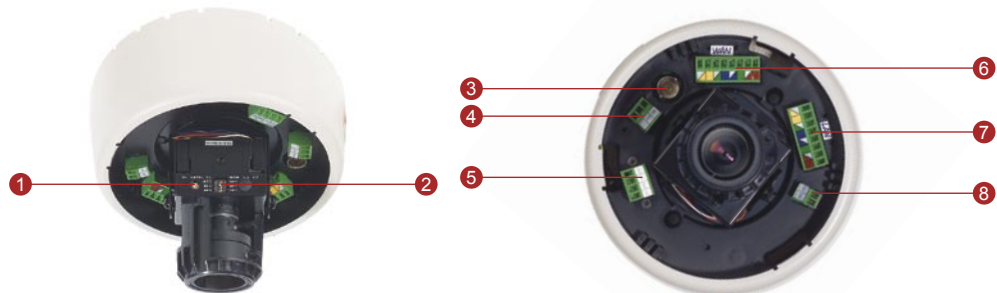

- |                         |                        |                                       |
|-------------------------|------------------------|---------------------------------------|
| ① DC level              | ④ Power input          | ⑦ LAN port (RJ-45 connector included) |
| ② Function DIP switches | ⑤ Digital input/output | ⑧ Audio input                         |
| ③ Analog video output   | ⑥ WAN port             |                                       |

## DIMENSION DIAGRAM

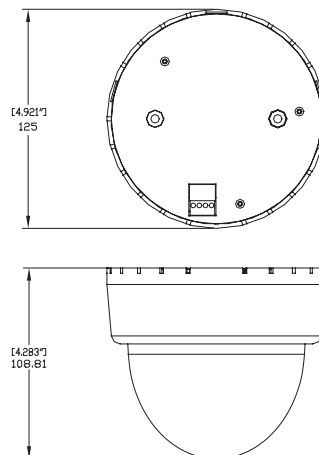

Unit: mm [inch]



# CAM-7200 Series

## PRODUCT SPECIFICATION

		CAM-7200	CAM-7220
Image	Device	SONY SuperHAD CCD	SONY EXviewHAD CCD
	Size	1/3 inch	
	Effective Pixels (HXV)	811 x 508 (NTSC); 795 x 596 (PAL)	
	Horizontal Resolution	480 TVL	
Min. scene Illumination	Color	0.15 Lux at F1.2 (30 IRE, SAGC ON)	Color mode automaticall switched to B/W mode under 4 Lux
	B/W	N/A	0.05 Lux at F1.2 (30 IRE, SAGC ON)
	IR Sensitivity	N/A	from 700 nm to 1100 nm
Lens	Focal Length	3.8 ~ 9.5mm	
	Viewing Angle	74.2° ~ 30.0° (Horizontal)	
Camera Angle Adjustment	X (Panning)	0° ~ 360°	
	Y (Tilting)	0° ~ 90°	
Synchronization	Sync. System	Internal / Line-lock	
Day/Night Functions	Mechanical IR Cut Filter	N/A	Yes
Functions	Motion Detection	Yes (3 windows)	
	Electronic Shutter	1/60 ~ 1/100,000 sec. (NTSC); 1/50 ~ 1/100,000 sec. (PAL)	
	BLC	On / Off (Switchable)	
	AGC	On / Off (Switchable)	On / Off (Switchable) Turning off AGC wil disable D&N function
	White Balance	AWB / PWB (switchable)	
	Flickerless	On / Off (switchable)	
	Auto Iris Control	Video / DC (switchable)	
S/N Ratio	S/N Ratio	Better than 50 dB	
Video (Compression)	Compression	MPEG-4 ASP compliant	
	Picture Resolution	Full D1 (720x480 in NTSC, 720x576 in PAL); CIF (352x240 in NTSC, 352x288 in PAL); QCIF (160x112 in NTSC, 176x144 in PAL)	
	Bit Rate	28 K ~ 3 M bps	
	Multi-stream	Up to 4 Configurable frame rate/bit rate streams for preview and recording	
Video Output	Composite Output	CVBS, 1.0Vp-p with 75 Ω loading, BNC connector	
Audio Input	Compression	8 kHz, Mono, PCM	
	Audio Line Input	Unbalanced, 1.4 Vp-p, 1Vrms, 3.5 mm Jack	
Alarm	Input	1, TTL, terminal block	
	Output	1, TTL, terminal block	
External I/O	Reset Button	Factory default	
	LED	System status	
Casing	Mount Types	Surface / Flush (option) / Wall (option)	
Network	LAN Port	Ethernet(10/100 Base-T), terminal block	
	WAN Port	Ethernet(10/100 Base-T), terminal block	
	Protocol	TCP, UDP, IP, HTTP, DHCP, PPPoE, RTP, RTSP, FTP, SMTP	
Software	Web Browser	Microsoft Internet Explorer 6.0 or above	
	SDK	ActiveX control, C SDK	
	Security	Password Protection: configured by the administrator	
Operating	Temperature	5 °C ~ 50 °C (40 °F ~ 122 °F)	
Power	Power Requirement	DC 12 V ±10% (CAM-7200) PoE (IEEE802.3af) with Class 3 (CAM-7201)	DC 12 V ±10% (CAM-7220) PoE (IEEE802.3af) with Class 3 (CAM-7221)
	Power Consumption	7.2 W (DC 12 V) 8.64 W (PoE)	7.2 W (DC 12 V) 8.64 W (PoE)
Physical	Dimensions (ØxH)	125 mm x 108.81 mm (4.92" x 4.28")	
	Weight	1,020 g (2.25 lb)	

## ORDERING INFORMATION


Model Name	NTSC	PAL	D & N	DC 12 V	DC 12 V / PoE
CAM-7200N	V			V	
CAM-7200P		V		V	
CAM-7201N	V				V
CAM-7201P		V			V
CAM-7220N	V		V	V	
CAM-7220P		V	V	V	
CAM-7221N	V		V		V
CAM-7221P		V	V		V

## ACCESSORY OPTIONS

- Wall mount kit MTB-201-R0
- Flush mount kit MTB-503



MTB-201-R0



MTB-503